



DOCUMENT DE TREBALL

XREAP2009-12

**Traffic forecasts under uncertainty
and capacity constraints**

Anna Matas (GEAP)
Josep-Lluís Raymond (GEAP)
Adriana Ruiz (GEAP)

Traffic forecasts under uncertainty and capacity constraints

Anna Matas

Dpt. Economia Aplicada. Universitat Autònoma de Barcelona

Josep-Lluís Raymond

Dpt. Economia i Història Econòmica. Universitat Autònoma de Barcelona

Adriana Ruiz

Dpt. Economia Aplicada. Universitat Autònoma de Barcelona

ABSTRACT

Traffic forecasts provide essential input for the appraisal of transport investment projects. However, according to recent empirical evidence, long-term predictions are subject to high levels of uncertainty. This paper quantifies uncertainty in traffic forecasts for the tolled motorway network in Spain. Uncertainty is quantified in the form of a confidence interval for the traffic forecast that includes both model uncertainty and input uncertainty. We apply a stochastic simulation process based on bootstrapping techniques. Furthermore, the paper proposes a new methodology to account for capacity constraints in long-term traffic forecasts. Specifically, we suggest a dynamic model in which the speed of adjustment is related to the ratio between the actual traffic flow and the maximum capacity of the motorway. This methodology is applied to a specific public policy that consists of suppressing the toll on a certain motorway section before the concession expires.

The authors thank all the members of the research project “Socio-economic and financial appraisal of transport projects” for all their valuable suggestions on early drafts of this paper. The project benefited from a research grant from the Ministerio de Fomento-CEDEX (PT2007-001-IAPP).

1. Introduction

Traffic forecasts provide essential input for the appraisal of transport investment projects and public policies. In spite of significant improvements to transport demand models over the past few decades, there are still high levels of uncertainty in long-term forecasts. For instance, a recent study by Flyvbjerg et al. (2006) concludes that accuracy in forecasting traffic flow has not improved over time. Given that project profitability is highly dependent on predicted traffic flow, uncertainty has to be quantified and accounted for in project evaluation.

This paper quantifies uncertainty in traffic forecasts for the tolled motorway network in Spain. We estimate a demand model using a panel data set covering 67 tolled motorway sections between 1980 and 2008. Uncertainty is quantified in the form of a confidence interval for the traffic forecast that includes both the variance of the traffic forecast related to the stochastic character of the model (model uncertainty) and the uncertainty that underlines the future values of the exogenous variables (input uncertainty). Furthermore, we apply this methodology to a specific public policy consisting of suppressing the toll on a certain motorway section before the concession expires. In this case, the government has to compensate the private motorway concessionaire for the revenue forgone up to the end of the concession period. We present a point estimate for the present value of the forgone revenue, as if the result were certain, and then a set of confidence intervals at different levels of significance that account for the variance of the forecasting error.

The predictions are based on an aggregate demand equation, where traffic flow depends on the standard variables. However, if maximum infrastructure capacity is not allowed for in the model, it may well be that predictions lie above this maximum value. To avoid this problem we should, ideally, estimate an integrated demand-supply system. However, as is often the case, we are not able to model the supply side of the system due to lack of data. Our paper contributes to this issue by proposing a functional form for the demand equation that accounts for the fact that the rate of traffic flow growth diminishes as it approaches full capacity. Specifically, as detailed in section 3, we suggest a modified partial adjustment model with variable adjustment speed.

2. Literature review of uncertainty in traffic forecasting

Several recent studies confirm the inaccuracy of traffic predictions. Among them, the extensive work by Flyvbjerg, Skamris Holm and Buhl (2006) based on 210 transport infrastructure projects in 14 nations, 27 of which correspond to rail projects and the rest to road projects. They conclude that passenger forecasts for nine out of ten rail projects are overestimated, with an average overestimation of 106%. The authors suggest that there is a systematic positive bias in rail traffic forecasts. For road projects, forecasts are more accurate and balanced, although for 50% of the projects the difference between actual and forecasted traffic was more than $\pm 20\%$ ¹. For both road and rail projects, the estimated standard deviation of the forecasting error is high, showing a high level of uncertainty and risk.

Bain (2009) presents the results from a study that analyses the toll road traffic forecasting performance from a database including over 100 international toll road projects. The research confirms a large range of error in traffic forecasting and the

¹ The authors suggest reference class forecasting as an alternative methodology. This proposal is detailed in Flyvbjerg (2008).

existence of systematic optimism bias. On average, toll road forecasts overestimated first-year traffic by 20-30%.

Using data on 14 toll motorway concessions in Spain, Vassallo and Baeza (2007) found that, on average, actual traffic was overestimated by approximately 35% during the first three years of operation. They conclude that there is a substantial optimism bias in the ramp-up period for toll motorway concessions in Spain.

In spite of the significant errors present in traffic forecasting, uncertainty is often a neglected issue. Most of the predictions are presented as point estimates and the actual likelihood of this outcome is forgotten about. The most common way to deal with uncertainty is to present alternative estimates based on different scenarios for the exogenous variables. However, this approach does not recognise all sources of uncertainty and, most importantly, does not provide the likelihood of each alternative forecast.

As stated by de Jong et al. (2007), the literature on quantifying uncertainty in traffic forecasting is fairly limited. The author reviews a considerable amount of the literature on that subject considering both the methodology employed and the results obtained. He distinguishes between input uncertainty, associated with the fact that future values of the exogenous variables are unknown, and model uncertainty which includes random term uncertainty and coefficient uncertainty. Given that the 21 studies reviewed use different measures to express uncertainty and many of them do not present quantitative outcomes, providing an order of magnitude for uncertainty is difficult. De Jong suggests that input uncertainty is more important than model uncertainty; studies on input

uncertainty or both input and model uncertainty obtain 95% confidence intervals for link flows between 18% and 33% of the mean. The aforementioned paper also offers a methodology for quantifying uncertainty for a case study in The Netherlands.

The literature shows that quantifying forecast uncertainty and its causes is an area that deserves more attention. This paper intends to contribute to this issue with new findings.

3. The model

Given that the demand equation is estimated in order to predict future traffic flow, when specifying the equation we should take into account that as the volume of traffic increases, costs related to congestion emerge and the traffic rate of growth diminishes as it approaches maximum capacity.

Ideally, congestion costs and capacity constraints should be considered by using an integrated demand-supply system. However, this is frequently unfeasible. As an alternative approach, we suggest a functional form that can be considered as an implicit reduced form for the demand function. Specifically, we estimate a modified partial adjustment model, where the speed of adjustment is variable. The proposed equation can be derived as follows:

The static equation of the partial adjustment model takes the standard form and shows the equilibrium value of traffic Y^* as a function of a set of variables X :

$$\ln Y_{it}^* = \alpha_i + \beta \ln X_{it} \quad (1)$$

The dynamic of the adjustment is modified by introducing a variable adjustment parameter, λ_{it} :

$$\Delta \ln Y_{it} = \lambda_{it} \cdot (\ln Y_{it}^* - \ln Y_{it-1}) + \varepsilon_{it} \quad (2)$$

We assume that the speed of adjustment decreases as traffic flow increases in the following terms. Let us define the quality level of the motorway, τ , as a function of the traffic flow related to the maximum capacity of the infrastructure, Y^0 :

$$\tau_{it} = \frac{Y_i^0 - Y_{it-1}}{Y_i^0} \quad (3)$$

Then, the adjustment parameter is assumed to be a function of τ_{it} :

$$\lambda_{it} = \theta \left(\frac{Y_i^0 - Y_{it-1}}{Y_i^0} \right) = \theta \cdot \tau_{it} \quad (4)$$

This functional form accounts for the fact that the traffic rate of growth is diminishing as it approaches the capacity limit. Its implications can be best observed in two polar cases. When there is no traffic on the motorway, the speed of adjustment is maximum:

$$Y_{it-1} = 0 \rightarrow \tau_{it} = 1 \rightarrow \lambda_{it} = \theta \quad (5)$$

In the opposite case, when traffic has reached capacity, the speed of adjustment is zero:

$$Y_{it-1} = Y_i^0 \rightarrow \tau_{it} = 0 \rightarrow \lambda_{it} = 0 \quad (6)$$

By substituting $\ln Y^*$ from equation (1) into (2), we get the first equation:

$$\Delta \ln Y_{it} = \lambda_{it} \cdot (\alpha_i + \beta \cdot \ln X_{it} - \ln Y_{it-1}) + \varepsilon_{it} \quad (7)$$

Next, substituting λ_{it} for its value we get the final equation:

$$\frac{\Delta \ln Y_{it}}{\tau_{it}} = (\theta \cdot \alpha_i + \theta \cdot \beta \cdot \ln X_{it} - \theta \cdot \ln Y_{it-1}) + \frac{\varepsilon_{it}}{\tau_{it}} \quad (8)$$

This is a heteroskedastic model, so we have estimated using weighted least squares. This formulation does not need to be restricted to the partial adjustment model. It can be easily generalised to “s” lags by assuming that the adjustment process is a weighted function of “s” lags, as shown in Appendix 1.

We estimate a standard demand equation where variables are expressed in logs². The traffic volume in each section is a function of the level of economic activity (measured by Gross Domestic Product, GDP), the toll rate per kilometre, the price of gasoline and a set of dummy variables that capture major changes in the road network³. The demand function can be expressed as follows:

$$\frac{\Delta \ln Y_{it}}{\tau_{it}} = (\theta \cdot \alpha_i + \theta \cdot \beta_{1i} \cdot \ln GDP_t + \theta \cdot \beta_{2i} \cdot \ln GP_t + \theta \cdot \beta_{3i} \cdot \ln T_{it} + \gamma_i \cdot Z_{it} - \theta \cdot \ln Y_{it-1}) + \frac{\varepsilon_{it}}{\tau_{it}} \quad (9)$$

Where Y_{it} = traffic volume on motorway section i in period t

GDP_t = real GDP in period t

GP_t = gasoline price in period t deflated by Consumer Price Index, CPI)

T_{it} = motorway toll in section i period t deflated by CPI

Z_{it} = dummy variables capturing major changes in the network

α_i = individual fixed effects

ε_{it} = error term

The individual fixed effects explain the differences between cross-section observations not captured by the variables included in the model. In our case, they may capture generation and attraction effects that determine the magnitude of traffic in each motorway section.

² We considered the three alternatives most widely used to estimate aggregate demand functions: the linear model, the semi-log model and the log-linear model. According to the criterion, based on the log of the likelihood functions from each model, we selected the log-linear specification.

³ Matas and Raymond (2003) provide a justification for this model specification.

4. The data

To estimate the demand equation, we used a panel data set of 67 motorway sections observed between 1980 and 2008, although not all cross-section units were observed for this temporal span. The total number of observations was 1765. The cross-section observations correspond to the shortest motorway section allowed by the data collection processes, with an average length of 20 kilometres.

The dependent variable is the annual average daily traffic volume in each section. The explanatory variables are: real GDP, gasoline price and toll per km. The last two deflated by CPI. GDP and gasoline price are defined at the national level and take the same value for all sections in the sample⁴. Finally, a set of 31 dummy variables captures the most important changes in the road network. For example, improvements on a parallel free road were captured by a dummy variable that takes value 1 since the opening year. The main descriptive statistics for the variables are outlined in Table 1.

Table 1. Descriptive statistics

	Mean	Maximum	Minimum	Std. Dev.
Traffic volume	16807	90033	1689	13523
GDP (millions of €) ¹	733009	1063202	471466	177785
Gasoline price (€ per liter) ¹	0.982	1.496	0.832	0.176
Toll (€ per km) ¹	0.126	0.343	0.058	0.050
Maximum capacity	78700	121192	59700	15407

¹ The base year for variables expressed in euros is 2006.

It is interesting to note that there are substantial differences in traffic volume among the different sections of the motorway network. The daily average traffic flow ranges from

⁴ In some preliminary estimations we used GDP and gasoline prices at the regional level. The estimated coefficients and the degree of adjustment showed to be almost the same. Therefore, given that for series defined at national level the available time span is much larger, we decided to use GDP and gasoline prices at the national level in order to obtain better forecasting models for the input variables.

1689 vehicles in the section and year having the lowest volume to 90033 in the section and year with the highest. Furthermore, we found an extensive price range for toll rates. For the whole period, at 2006 prices, the lowest price paid per km was about 0.058€, whereas the highest was about 0.34€. The reasons for this wide variation are twofold. Firstly, each motorway has to cover its own construction costs, so the toll rates are higher on those motorways with larger construction costs or lower traffic volume. Secondly, the changes in toll policies during the last two decades have resulted in a wide variation of rates across the country and over time. For instance, on some motorway sections tolls decreased as much as 40% in one year.

The maximum capacity of each motorway section was calculated according to the number of lanes and types of vehicle.

5. Model estimation and results

Before estimating the model equation stated in (9), and in order to decide whether to estimate in levels or differences, we analyzed the existence of unit roots and the cointegration of the series. The traffic volume and GDP variables were clearly non-stationary. The evidence for motorway tolls and gasoline prices was doubtful. In any case, to justify an estimation using levels of those variables, it was necessary to guarantee that cointegration relations existed among them. Using the Kao test for panel data and based on the analysis of residuals, the null hypothesis of no cointegration was clearly rejected. Given that this hypothesis was rejected, we proceeded to estimate the equation in levels.

Table 2. Kao Residual Cointegration Test

Series: LOG(traffic_?) LOG(toll_?) LOG(GDP) LOG(gas price)

Sample: 1980-2008

Included observations: 29

Null Hypothesis: No cointegration

Trend assumption: No deterministic trend

User-specified lag length: 1

Newey-West automatic bandwidth selection and Bartlett kernel

	t-Statistic	Prob.
ADF	-4.676612	0.0000
Residual variance	0.001894	
HAC variance	0.003072	

As specified in equation (9), the estimation of the demand equation would require to estimate 400 coefficients. Given that the number of total observations was 1765, it seemed advisable to introduce some constraints to the coefficients in order to allow for efficiency gains. Based on a previous work by Matas and Raymond (2003), we assumed that the demand elasticity of GDP and gasoline prices were the same across all motorway sections. Nonetheless, we maintained a specific toll coefficient for each motorway section.

Under these assumptions, we estimated equation (9) using weighted least squares. An AR(1) term was included to control autocorrelation of the error term. The coefficients for GDP, gasoline price, and the lagged value of the dependent variable take the expected sign and were estimated with a high degree of precision. In relation to the toll coefficients, a significant variation across motorway sections was observed. A Chi-square test allowed us to clearly reject the null hypothesis of equality of toll coefficients across all sections. However, the difference in the values of the toll coefficients could be explained by certain motorway characteristics: contiguous sections on the same motorway present very similar characteristics; the more inelastic sections are located on

corridors with high traffic volumes, and demand is seen to be more elastic where a good alternative free road exists.

The observed results suggested the possibility of re-estimating the model by introducing the hypothesis of equality of toll coefficients across those motorway sections that showed similar coefficients in the initial model. We re-estimated the initial model introducing equality constraints among coefficients not rejected by the data. The constraints were introduced by classifying the motorway sections into 3 groups according to the toll coefficient estimated in the general model:

- Low toll elasticity: sections with toll coefficient between 0 and -0.2.
- Medium toll elasticity: sections with toll coefficient between -0.2 and -0.35
- High toll elasticity: section with toll coefficients larger than -0.35.

The final estimation results are detailed in Table 3. As can be observed, the toll coefficients are estimated with a high degree of precision. Demand is sensitive to toll variations, although in the short term it is inelastic in all three groups.

Table 3. Estimation results

Dependent Variable: $D(\ln(\text{traffic}))/\tau$			
Estimation method: weighted least squares			
	Coefficient	Std. Error	t-Statistic
ln(GDP)	0.753772	0.040268	18.72
ln(Gas price)	-0.380198	0.015718	-24.19
ln(traffic(-1))	-0.605873	0.022587	-26.82
ln(toll_1)	-0.154903	0.015938	-9.72
ln(toll_2)	-0.340256	0.019311	-17.62
ln(toll_3)	-0.487923	0.027644	-17.65
AR(1)	0.734674	0.021841	33.64
Dummy variables	yes		
Fixed effects	yes		
R ²	0.62		
Observations	1668		

An interesting property of the proposed functional form is that it makes it possible to avoid the often unrealistic assumption of constant elasticity. As shown in Appendix 2, demand elasticity depends on the value of τ , that is, it depends on the degree of motorway use. For a given level of τ , elasticity in period J is defined as:

$$\varepsilon_J = \beta_k^* \cdot \frac{(1 - \gamma^{*J+1})}{(1 - \gamma^*)} \quad (10)$$

Where $\beta_k^* = \tau \cdot \beta_k$ and $\gamma^* = (1 - \tau \cdot \theta)$


As an illustration, we compute the demand elasticity with respect to GDP for different values of τ and for the first 6 years after the change in the exogenous variable. Elasticities are detailed in Table 4. For $\tau = 1$, when the level of traffic approaches 0, short-term elasticity is 0.8; after 5 years, the elasticity tends to the long-term value, 1.24. However, as traffic increases and τ decreases, demand elasticity becomes less sensitive to GDP variations. For $\tau = 0.1$, when traffic flow approaches capacity, short-term elasticity is less than 0.1. The elasticity values computed for $\tau = 0.7$, which correspond to the average observed value in our sample, are in line with those reported in the literature.

Table 4. Elasticities with respect to GDP

j (years)	tau			
	0.1	0.5	0.7	1
0	0.075	0.377	0.528	0.754
1	0.146	0.640	0.832	1.051
2	0.213	0.823	1.006	1.168
3	0.275	0.950	1.107	1.214
4	0.334	1.039	1.165	1.232
5	0.389	1.101	1.199	1.239

Figure 1 displays the elasticity values for τ ranging from 0.1 to 1.

Figure1. Elasticities with respect to GDP for different tau values

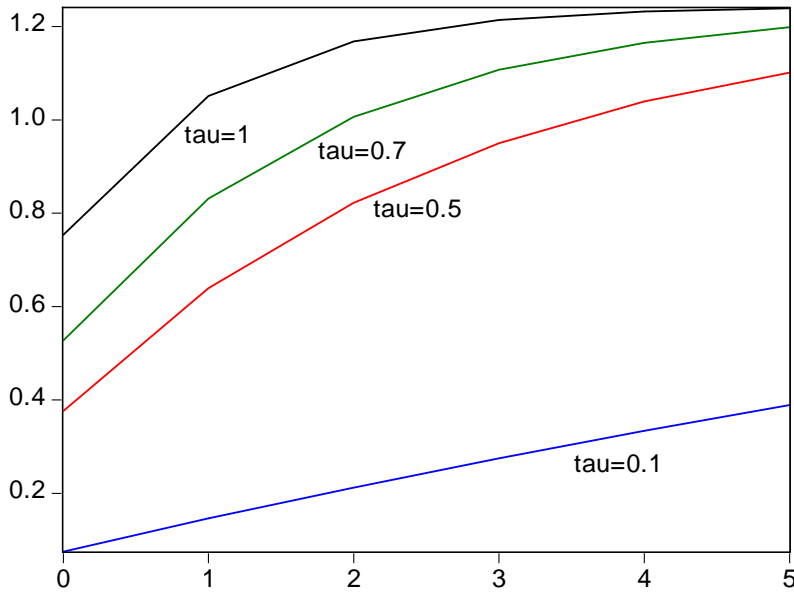

For the particular case where $\tau = 1$, the coefficients can be interpreted as those in the standard partial adjustment model. The short- and long-term elasticities for all the explanatory variables are reported in Table 5.

Table 5. Estimated demand elasticities

	tau = 1	
	Short Term	Long Term
GDP	0.754	1.244
Gasoline price	-0.380	-0.628
Toll 1	-0.155	-0.256
Toll 2	-0.340	-0.562
Toll 3	-0.488	-0.805


6. Forecast results and uncertainty

From the estimated demand model, we proceeded to forecast traffic flow for the 2009-2025 period. The first step was to predict the explanatory variables in the model. GDP and gasoline price are predicted according to a time series model and motorway tolls are assumed to remain constant in real terms given that the toll revision formula is linked to

CPI. We applied univariate distributions for the exogenous variables given that no correlations were observed among them.

Figure 2 displays the forecasted traffic flow for two representative motorway sections according to both a non-restricted model (standard partial adjustment model) and a capacity restricted model (modified partial adjustment model). In the first one, traffic flow is well below maximum capacity in the year 2025, whereas the second has reached capacity by approximately 2019. As can be observed, the effect of the capacity constraint is almost unnoticeable when traffic volume is below maximum capacity. However, the effect is clear for the second motorway section. The standard partial adjustment predicts an unrealistic level of traffic flow; whereas our suggested functional form forces traffic flow to remain below capacity.

Figure 2. Forecasted traffic flow for two motorway sections

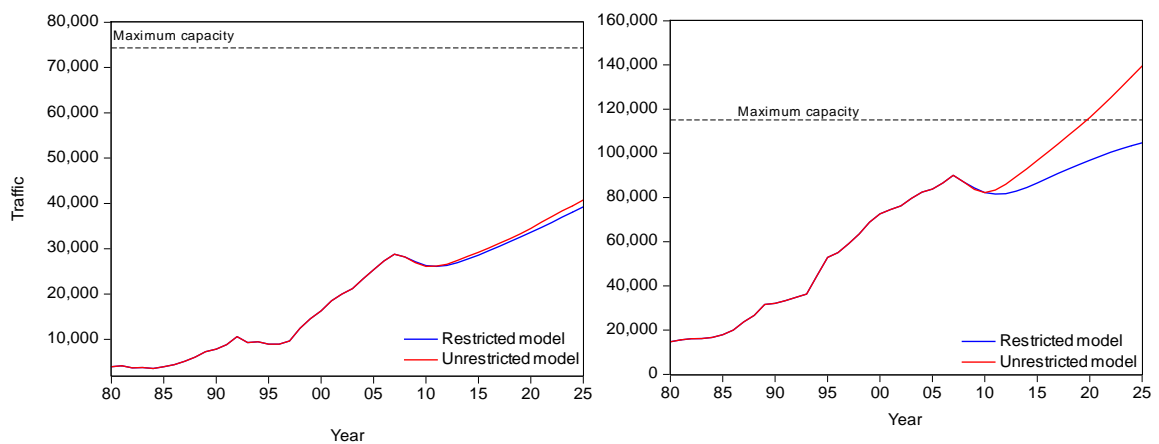

Finally, we proceeded to quantify uncertainty in the traffic forecasts. It is well known that there are three possible sources of error in traffic forecasting. The first one is input uncertainty, due to the fact that the future values of exogenous variables are unknown. The second one is random term uncertainty that accounts for specification errors in the

demand equation. The third is coefficient uncertainty, due to using parameter estimates instead of true values. The sum of the last two corresponds to model uncertainty.

To fix ideas, let us consider the following non-linear model:

$$y = \Phi(X, \beta, \varepsilon) \quad (11)$$

in which the dependent variable is, in general, a non-linear function of a set of explanatory variables, of a set of unknown β coefficients and of a random term ε . The forecasted values of the dependent variable are obtained by substituting the unknown terms for their respective estimates.

$$\hat{y} = \Phi(\hat{X}, \hat{\beta}, \hat{\varepsilon}) \quad (12)$$

In case we are dealing with a deterministic simulation, $\hat{\varepsilon}$ is fixed in the expected value of ε , that is zero, $\hat{\beta}$ is the estimated value of β , and \hat{X} is the assigned value of the explanatory variables.

In a stochastic simulation we assume that each of the elements of equation (11) follows a certain distribution. This is:

$$\begin{aligned} X &\square Dist(\hat{X}, \Sigma_{\hat{X}}) \\ \beta &\square Dist(\hat{\beta}, \Sigma_{\hat{\beta}}) \\ \varepsilon &\square Dist(0, \Sigma_{\varepsilon}) \end{aligned} \quad (13)$$

M random realizations of such distributions are generated using a bootstrap methodology. The model is solved for each realization of those distributions. So, M forecasted values of the dependent variable are obtained. The empirical distribution of the forecasted values enables an expected value to be computed that is the arithmetical average. Using the empirical distribution, for a certain confidence level, is also possible to compute upper and lower limits. The contribution to total uncertainty derived from

the components could be calculated by difference. In this study all three types of uncertainty have been obtained through a stochastic simulation process.

To evaluate total forecast uncertainty we consider the distribution of \hat{y} after generating M realizations of X, β, ε .

To evaluate model forecast uncertainty we consider the distribution of \hat{y} after generating M realizations of β, ε ; but holding the values of the explanatory variables X fixed in \hat{X} .

Finally, input uncertainty can be computed from the difference between total forecast uncertainty and model forecast uncertainty.

Because the model is non-linear it should be noted that the empirical average of the stochastic simulations, in general, will not coincide with the deterministic simulation. Therefore, in non-linear models the deterministic simulation will offer a biased forecast.

In this study the model has been solved repeatedly for 1000 random draws of various components.

To illustrate the impact of uncertainty, we computed the 70% confidence interval for the traffic forecast of one of the motorway sections. As can be observed in Figure 3, model uncertainty (black line) is relatively low and almost constant over time. However, once input uncertainty is added (red line) the confidence interval widens and clearly increases over time. The second part of Figure 3 shows the expected value of traffic for a deterministic forecast (green line), model uncertainty (black line) and total uncertainty

(red line). It can clearly be observed that the deterministic simulation will underpredict the average level of traffic flow.

As previously mentioned and shown in equation (11), the model is non-linear and stochastic. Under these conditions, in general, the deterministic solution of a stochastic model will offer a biased estimate of the expected traffic value. Nonetheless, the expected value of the traffic forecast can be approximated by using the average of a set of stochastic simulations. Applying this approach to all the motorway sections in the sample, we found that the stochastic forecast for the year 2025 was on average 8.8% higher than the deterministic forecast.

Figure 3. Confidence intervals and expected traffic flow for one motorway section

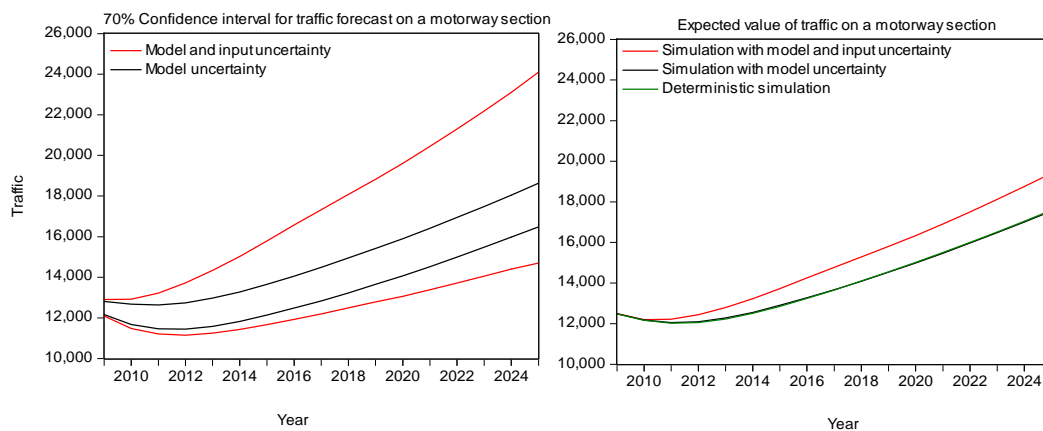


Table 6 offers an order of magnitude of uncertainty for the same motorway section featured in Figure 3. The coefficient of variation for total uncertainty ranges from 0.03 in the first forecasted year to 0.24 in the last. In the first few years, uncertainty is low and mainly explained by model uncertainty. However, as time goes by, total uncertainty increases due to lower precision in predicting the unknown values of exogenous variables.

Table 6. Coefficient of variation for total uncertainty and % explained by model and input

	CV	Model	Input
2009	0.032	80.3%	19.7%
2010	0.059	69.8%	30.2%
2011	0.082	59.3%	40.7%
2012	0.103	51.7%	48.3%
2013	0.121	47.2%	52.8%
2014	0.136	42.7%	57.3%
2015	0.150	38.9%	61.1%
2016	0.163	36.4%	63.6%
2017	0.174	34.8%	65.2%
2018	0.183	33.3%	66.7%
2019	0.191	31.8%	68.2%
2020	0.200	30.4%	69.6%
2021	0.209	29.1%	70.9%
2022	0.217	28.2%	71.8%
2023	0.224	27.1%	72.9%
2024	0.232	26.1%	73.9%
2025	0.242	25.3%	74.7%

7. Uncertainty effects on forecasting forgone revenue

In recent year, tolls on certain motorway sections have been removed before the concession expires. In these cases, the government has had to compensate the private motorway concessionaire for the revenue forgone up to the end of the concession period. We selected one motorway section in the sample in order to compute the effect of uncertainty on the revenue to be forgone. The selected section was 20 kilometres in length with an average traffic value of around 12800 vehicles per day. We assumed that the concession period would expire in 2025.


The annual revenue was obtained by multiplying the predicted traffic by the average toll paid by 365 days a year⁵. This value is computed for each forecasted year from 2009 to 2025 and for each of the 1000 random draws. Next, we worked out the results by

⁵ To obtain the compensation to be paid to the concessionaire, we should deduct from the revenue to be forgone any taxes or other costs related to toll operation.

calculating the Net Present Value (NPV) of the revenue to be forgone along these 17 years at a discounting rate of 5%.

Finally, we analysed the empirical distribution of the NPV, which enabled us to calculate the mean and the confidence intervals for different significance levels. For the selected motorway section, the expected NPV of revenue is 122,897,992 euros. The minimum and maximum values for the confidence interval at 70% significance are 106,595,480 euros and 137,934,400 euros; when we compute the interval at 95% the figures are 93,952,016 euros and 154,969,120 euros. In the first case, the difference between the two extremes is 29%, whereas in the second it rises to 65%.

Figure 4 presents the empirical distribution of the NPV.

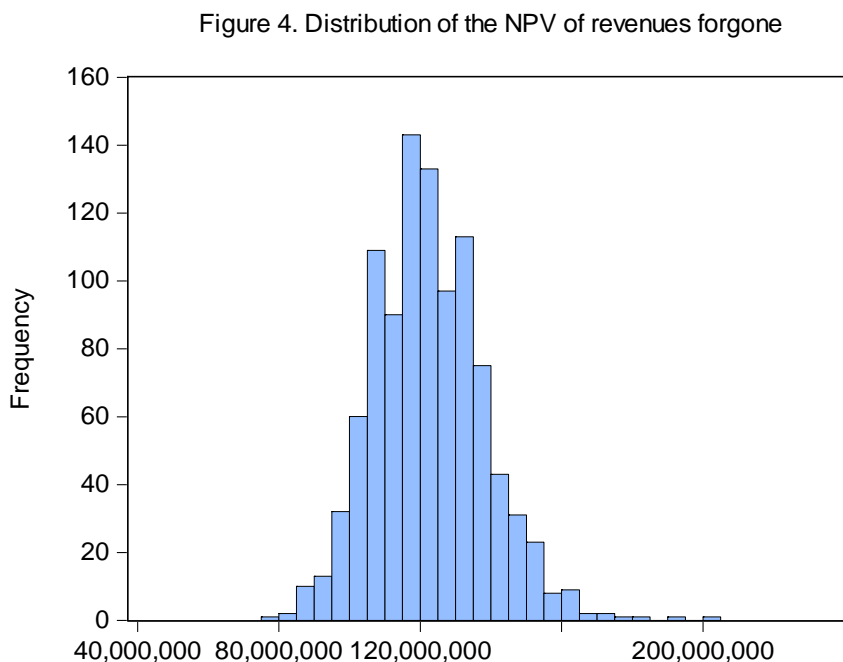

Quantifying uncertainty provides evidence that using point estimates to assess investments or public policies can lead to errors in the decision-making process. In this

example, the negotiation process between government and concessionaire should include the probabilities associated with the different forecasted revenue values.

8. Conclusions

This article proposes a new methodology for incorporating capacity constraints into long-term traffic predictions. Doubtless, a complete model that simultaneously considers traffic demand and traffic supply would be the best solution. However, frequently, not enough data is available to construct the supply side of the model. In such cases, our approach makes it possible to carry out long-term forecasts that verify the capacity constraints of the motorway without having to introduce an arbitrary functional form. This is achieved by specifying a dynamic model in which the speed of adjustment is related to the ratio between the actual traffic flow and the maximum capacity of the motorway.

This paper also outlines the importance of developing stochastic simulations based on bootstrapping methodologies in order to obtain confidence intervals for the forecast. In a traffic demand model, the uncertainty of the forecast depends on the uncertainty of the estimated coefficients and on the uncertainty coming from the random disturbance term of the model. It also depends on uncertainty about the future values of the explanatory variables. In general, the latter type of uncertainty is the most important. By integrating the three types of uncertainty through the stochastic simulation process, it is possible to obtain confidence intervals for future traffic volumes. In the case of toll motorways, those traffic intervals enable computing confidence intervals for the present value of the future toll revenue.

Finally, for non-linear models this paper calls attention to the inadequacy of the deterministic simulation to forecast future traffic volumes. When dealing with non-linear models, the expected future traffic value can be approximated by averaging the different realizations of the variable using stochastic simulations. As an illustration, this paper shows that the deterministic simulation at the end of the forecasting period underpredicts expected traffic flow across all motorway sections in the sample by on average 9% with a maximum difference of 12%.

9. References

- Bain, R. (2009). Error and optimism bias in toll road traffic forecasts. *Transportation*, 36 , 469–482.
- de Jong, G., Daly, A., Pieters, M., Miller, S., Plasmeijer, R., and Hofman, F. (2007). Uncertainty in traffic forecasts: literature review and new results for The Netherlands. *Transportation*, 34 , 375–395.
- Flyvbjerg, B. (2008). Curbing Optimism Bias and Strategic Misrepresentation in Planning: Reference Class Forecasting in Practice. *European Planning Studies*, 16:1 , 3-21.
- Flyvbjerg, B., Skamris, M., and Buhl, S. (2006). Inaccuracy in Traffic Forecasts. *Transport Reviews*, 26:1 , 1 - 24.
- Matas, A., and Raymond, J. (2003). Demand Elasticity on Tolloed Motorways. *Journal of Transportation and Statistics*, V6, N2/3 , 91-108.
- Vassallo, J., and Baeza, M. (2007) Why Traffic Forecasts in PPP Contracts Are Often Overestimated? *Research Paper, Final Draft, EIB University Research Sponsorship Programme*. European Investment Bank, Luxembourg.

Appendix 1. Generalisation to s lags

The dynamic partial adjustment model can be easily generalised to account for s lags as follows:

The static equilibrium equation takes the standard form:

$$\ln Y_{it}^* = \alpha + \beta \cdot \ln X_{it} \quad (1.1)$$

whereas for the dynamic part we assume that the adjustment process is a weighted function of s lags:

$$\Delta \ln Y_{it} = \lambda_{it} \cdot \left[w_1 \cdot (\ln Y_{it}^* - \ln Y_{it-1}) + w_2 \cdot (\ln Y_{it}^* - \ln Y_{it-2}) + \dots + w_s \cdot (\ln Y_{it}^* - \ln Y_{it-s}) \right] + \varepsilon_{it} \quad (1.2)$$

$$\sum_{i=1}^s w_i = 1$$

That is, the correction of the disequilibrium between the actual value and the optimal or desired value of the dependent variable at period t depends on the disequilibrium in the previous periods.

Substituting the expression for Y_{it}^* defined in (1.1) into equation (1.2), we obtain:

$$\Delta Y_{it} = \lambda_{it} \cdot \left[w_1 \cdot (\alpha_i + \beta \cdot X_{it} - Y_{it-1}) + w_2 \cdot (\alpha_i + \beta \cdot X_{it} - Y_{it-2}) + \dots + w_s \cdot (\alpha_i + \beta \cdot X_{it} - Y_{it-s}) \right] + \varepsilon_{it} =$$

$$\lambda_{it} \cdot \left[\alpha_i + \beta \cdot X_{it} - w_1 \cdot Y_{it-1} - w_2 \cdot Y_{it-2} - w_3 \cdot Y_{it-3} - \dots - w_{s-1} \cdot Y_{it-s+1} - Y_{it-s} \right] + \varepsilon_{it} =$$

$$\lambda_{it} \cdot \alpha_i + \lambda_{it} \cdot \beta \cdot X_{it} - \lambda_{it} \cdot w_1 \cdot Y_{it-1} - \lambda_{it} \cdot w_2 \cdot Y_{it-2} - \dots - \lambda_{it} \cdot w_{s-1} \cdot Y_{it-s+1} - \lambda_{it} \cdot Y_{it-s} + \varepsilon_{it}$$

Given that

$$\lambda_{it} = \theta \cdot \left(\frac{Y_i^0 - Y_{it-1}}{Y_i^0} \right) = \theta \cdot \tau_{it}$$

and substituting:

$$\Delta \ln Y_{it} = \theta \cdot \tau_{it} \cdot \alpha_i + \theta \cdot \tau_{it} \cdot \beta \cdot \ln X_{it} - \theta \cdot \tau_{it} \cdot w_1 \cdot \ln Y_{it-1} - \theta \cdot \tau_{it} \cdot w_2 \cdot \ln Y_{it-2} -$$

$$- \dots - \theta \cdot \tau_{it} \cdot w_{s-1} \cdot \ln Y_{it-s+1} - \theta \cdot \tau_{it} \cdot \ln Y_{it-s} + \varepsilon_{it}$$

That is:

$$\frac{\Delta \ln Y_{it}}{\tau_{it}} = \theta \cdot \alpha_i + \theta \cdot \beta \cdot \ln X_{it} - \theta \cdot w_1 \cdot \ln Y_{it-1} - \theta \cdot w_2 \cdot \ln Y_{it-2} - \dots - \theta \cdot w_{s-1} \cdot \ln Y_{it-s+1} - \theta \cdot \ln Y_{it-s} + \frac{\varepsilon_{it}}{\tau_{it}^p}$$

Appendix 2. Demand elasticity with a capacity constraint

This appendix shows how demand elasticity depends on the level of traffic when a constraint on infrastructure capacity is in force.

For simplicity, we assume that the modified partial adjustment model is:

$$\frac{\Delta \ln Y_{it}}{\tau_{it}} = \beta_0 + \beta_1 \cdot \ln X_{it} - \theta \cdot \ln Y_{it-1}$$

It can be rewritten as:

$$\ln Y_{it} = \tau_{it} \cdot \beta_0 + \tau_{it} \cdot \beta_1 \cdot \ln X_{it} + (1 - \tau_{it} \cdot \theta) \cdot \ln Y_{it-1}$$

$$\ln Y_{it} = \beta_{0it}^* + \beta_{1it}^* \cdot \ln X_{it} + \gamma_{it}^* \cdot \ln Y_{it-1}$$

where

$$\beta_{kit}^* = \tau_{it} \cdot \beta_k \quad \gamma_{it}^* = (1 - \tau_{it} \cdot \theta)$$

For a given level of traffic flow, τ , we have:

$$\ln Y_{it} = \beta_0^* + \beta_1^* \cdot \ln X_{it} + \gamma^* \cdot \ln Y_{it-1}$$

$$\beta_k^* = \tau \cdot \beta_k \quad \gamma^* = (1 - \tau \cdot \theta)$$

Taking into account the dynamic structure of the model and following a recursive process of substitution, the elasticity in period J will be:

$$\varepsilon_J = \beta_k^* \cdot \frac{(1 - \gamma^{*J+1})}{(1 - \gamma^*)}$$



2006

CREAP2006-01

Matas, A. (GEAP); **Raymond, J.Ll.** (GEAP)

"Economic development and changes in car ownership patterns"
(Juny 2006)

CREAP2006-02

Trillas, F. (IEB); **Montolio, D.** (IEB); **Duch, N.** (IEB)

"Productive efficiency and regulatory reform: The case of Vehicle Inspection Services"
(Setembre 2006)

CREAP2006-03

Bel, G. (PPRE-IREA); **Fageda, X.** (PPRE-IREA)

"Factors explaining local privatization: A meta-regression analysis"
(Octubre 2006)

CREAP2006-04

Fernández-Villadangos, L. (PPRE-IREA)

"Are two-part tariffs efficient when consumers plan ahead?: An empirical study"
(Octubre 2006)

CREAP2006-05

Artís, M. (AQR-IREA); **Ramos, R.** (AQR-IREA); **Suriñach, J.** (AQR-IREA)

"Job losses, outsourcing and relocation: Empirical evidence using microdata"
(Octubre 2006)

CREAP2006-06

Alcañiz, M. (RISC-IREA); **Costa, A.**; **Guillén, M.** (RISC-IREA); **Luna, C.**; **Rovira, C.**

"Calculation of the variance in surveys of the economic climate"
(Novembre 2006)

CREAP2006-07

Albalade, D. (PPRE-IREA)

"Lowering blood alcohol content levels to save lives: The European Experience"
(Desembre 2006)

CREAP2006-08

Garrido, A. (IEB); **Arqué, P.** (IEB)

"The choice of banking firm: Are the interest rate a significant criteria?"
(Desembre 2006)



CREAP2006-09

Segarra, A. (GRIT); Teruel-Carrizosa, M. (GRIT)

"Productivity growth and competition in spanish manufacturing firms:

What has happened in recent years?"

(Desembre 2006)

CREAP2006-10

Andonova, V.; Díaz-Serrano, Luis. (CREB)

"Political institutions and the development of telecommunications"

(Desembre 2006)

CREAP2006-11

Raymond, J.L.(GEAP); Roig, J.L.. (GEAP)

"Capital humano: un análisis comparativo Catalunya-España"

(Desembre 2006)

CREAP2006-12

Rodríguez, M.(CREB); Stoyanova, A. (CREB)

"Changes in the demand for private medical insurance following a shift in tax incentives"

(Desembre 2006)

CREAP2006-13

Royuela, V. (AQR-IREA); Lambiri, D.; Biagi, B.

"Economía urbana y calidad de vida. Una revisión del estado del conocimiento en España"

(Desembre 2006)

CREAP2006-14

Camarero, M.; Carrion-i-Silvestre, J.LL. (AQR-IREA); Tamarit, C.

"New evidence of the real interest rate parity for OECD countries using panel unit root tests with breaks"

(Desembre 2006)

CREAP2006-15

Karanassou, M.; Sala, H. (GEAP); Snower, D. J.

"The macroeconomics of the labor market: Three fundamental views"

(Desembre 2006)



2007

XREAP2007-01

Castany, L (AQR-IREA); **López-Bazo, E.** (AQR-IREA); **Moreno, R.** (AQR-IREA)

"Decomposing differences in total factor productivity across firm size"

(Març 2007)

XREAP2007-02

Raymond, J. Ll. (GEAP); **Roig, J. Ll.** (GEAP)

"Una propuesta de evaluación de las externalidades de capital humano en la empresa"

(Abril 2007)

XREAP2007-03

Durán, J. M. (IEB); **Esteller, A.** (IEB)

"An empirical analysis of wealth taxation: Equity vs. Tax compliance"

(Juny 2007)

XREAP2007-04

Matas, A. (GEAP); **Raymond, J.Ll.** (GEAP)

"Cross-section data, disequilibrium situations and estimated coefficients: evidence from car ownership demand"

(Juny 2007)

XREAP2007-05

Jofre-Montseny, J. (IEB); **Solé-Ollé, A.** (IEB)

"Tax differentials and agglomeration economies in intraregional firm location"

(Juny 2007)

XREAP2007-06

Álvarez-Albelo, C. (CREB); **Hernández-Martín, R.**

"Explaining high economic growth in small tourism countries with a dynamic general equilibrium model"

(Juliol 2007)

XREAP2007-07

Duch, N. (IEB); **Montolio, D.** (IEB); **Mediavilla, M.**

"Evaluating the impact of public subsidies on a firm's performance: a quasi-experimental approach"

(Juliol 2007)

XREAP2007-08

Segarra-Blasco, A. (GRIT)

"Innovation sources and productivity: a quantile regression analysis"

(Octubre 2007)



XREAP2007-09

Albalate, D. (PPRE-IREA)

“Shifting death to their Alternatives: The case of Toll Motorways”
(Octubre 2007)

XREAP2007-10

Segarra-Blasco, A. (GRIT); **Garcia-Quevedo, J.** (IEB); **Teruel-Carrizosa, M.** (GRIT)

“Barriers to innovation and public policy in catalonia”
(Novembre 2007)

XREAP2007-11

Bel, G. (PPRE-IREA); **Foote, J.**

“Comparison of recent toll road concession transactions in the United States and France”
(Novembre 2007)

XREAP2007-12

Segarra-Blasco, A. (GRIT);

“Innovation, R&D spillovers and productivity: the role of knowledge-intensive services”
(Novembre 2007)

XREAP2007-13

Bermúdez Morata, Ll. (RFA-IREA); **Guillén Estany, M.** (RFA-IREA), **Solé Auró, A.** (RFA-IREA)

“Impacto de la inmigración sobre la esperanza de vida en salud y en discapacidad de la población española”
(Novembre 2007)

XREAP2007-14

Calaeys, P. (AQR-IREA); **Ramos, R.** (AQR-IREA), **Suriñach, J.** (AQR-IREA)

“Fiscal sustainability across government tiers”
(Desembre 2007)

XREAP2007-15

Sánchez Hugalbe, A. (IEB)

“Influencia de la inmigración en la elección escolar”
(Desembre 2007)



2008

XREAP2008-01

Durán Weitkamp, C. (GRIT); Martín Bofarull, M. (GRIT) ; Pablo Martí, F.
“Economic effects of road accessibility in the Pyrenees: User perspective”
(Gener 2008)

XREAP2008-02

Díaz-Serrano, L.; Stoyanova, A. P. (CREB)
“The Causal Relationship between Individual’s Choice Behavior and Self-Reported Satisfaction: the Case of Residential Mobility in the EU”
(Març 2008)

XREAP2008-03

Matas, A. (GEAP); Raymond, J. L. (GEAP); Roig, J. L. (GEAP)
“Car ownership and access to jobs in Spain”
(Abril 2008)

XREAP2008-04

Bel, G. (PPRE-IREA) ; Fageda, X. (PPRE-IREA)
“Privatization and competition in the delivery of local services: An empirical examination of the dual market hypothesis”
(Abril 2008)

XREAP2008-05

Matas, A. (GEAP); Raymond, J. L. (GEAP); Roig, J. L. (GEAP)
“Job accessibility and employment probability”
(Maig 2008)

XREAP2008-06

Basher, S. A.; Carrión, J. Ll. (AQR-IREA)
Deconstructing Shocks and Persistence in OECD Real Exchange Rates
(Juny 2008)

XREAP2008-07

Sanromá, E. (IEB); Ramos, R. (AQR-IREA); Simón, H.
Portabilidad del capital humano y asimilación de los inmigrantes. Evidencia para España
(Juliol 2008)

XREAP2008-08

Basher, S. A.; Carrión, J. Ll. (AQR-IREA)
Price level convergence, purchasing power parity and multiple structural breaks: An application to US cities
(Juliol 2008)

XREAP2008-09

Bermúdez, Ll. (RFA-IREA)
A priori ratemaking using bivariate poisson regression models
(Juliol 2008)



XREAP2008-10

Solé-Ollé, A. (IEB), **Hortas Rico, M.** (IEB)

Does urban sprawl increase the costs of providing local public services? Evidence from Spanish municipalities

(Novembre 2008)

XREAP2008-11

Teruel-Carrizosa, M. (GRIT), **Segarra-Blasco, A.** (GRIT)

Immigration and Firm Growth: Evidence from Spanish cities

(Novembre 2008)

XREAP2008-12

Duch-Brown, N. (IEB), **García-Quevedo, J.** (IEB), **Montolio, D.** (IEB)

Assessing the assignation of public subsidies: Do the experts choose the most efficient R&D projects?

(Novembre 2008)

XREAP2008-13

Bilokach, V., **Fageda, X.** (PPRE-IREA), **Flores-Fillol, R.**

Scheduled service versus personal transportation: the role of distance

(Desembre 2008)

XREAP2008-14

Albalate, D. (PPRE-IREA), **Gel, G.** (PPRE-IREA)

Tourism and urban transport: Holding demand pressure under supply constraints

(Desembre 2008)



2009

XREAP2009-01

Calonge, S. (CREB); Tejada, O.

“A theoretical and practical study on linear reforms of dual taxes”
(Febrer 2009)

XREAP2009-02

Albalate, D. (PPRE-IREA); Fernández-Villadangos, L. (PPRE-IREA)

“Exploring Determinants of Urban Motorcycle Accident Severity: The Case of Barcelona”
(Març 2009)

XREAP2009-03

Borrell, J. R. (PPRE-IREA); Fernández-Villadangos, L. (PPRE-IREA)

“Assessing excess profits from different entry regulations”
(Abril 2009)

XREAP2009-04

Sanromá, E. (IEB); Ramos, R. (AQR-IREA), Simon, H.

“Los salarios de los inmigrantes en el mercado de trabajo español. ¿Importa el origen del capital humano?”
(Abril 2009)

XREAP2009-05

Jiménez, J. L.; Perdiguero, J. (PPRE-IREA)

“(No)competition in the Spanish retailing gasoline market: a variance filter approach”
(Maig 2009)

XREAP2009-06

Álvarez-Albelo, C. D. (CREB), Manresa, A. (CREB), Pigem-Vigo, M. (CREB)

“International trade as the sole engine of growth for an economy”
(Juny 2009)

XREAP2009-07

Callejón, M. (PPRE-IREA), Ortún V, M.

“The Black Box of Business Dynamics”
(Setembre 2009)

XREAP2009-08

Lucena, A. (CREB)

“The antecedents and innovation consequences of organizational search: empirical evidence for Spain”
(Octubre 2009)

XREAP2009-09

Domènech Campmajó, L. (PPRE-IREA)

“Competition between TV Platforms”
(Octubre 2009)



XREAP2009-10

Solé-Auró, A. (RFA-IREA), **Guillén, M.** (RFA-IREA), **Crimmins, E. M.**

“Health care utilization among immigrants and native-born populations in 11 European countries. Results from the Survey of Health, Ageing and Retirement in Europe”

(Octubre 2009)

XREAP2009-11

Segarra, A. (GRIT), **Teruel, M.** (GRIT)

“Small firms, growth and financial constraints”

(Octubre 2009)

XREAP2009-12

Matas, A. (GEAP), **Raymond, J.Ll.** (GEAP), **Ruiz, A.** (GEAP)

“Traffic forecasts under uncertainty and capacity constraints”

(Novembre 2009)



xreap@pcb.ub.es